


Luxor Cable Connection Method


Important Note:

If by chance you have too much slack in your cable at the point where it attaches to the cable coupler, you may trim down the excess to ensure your cables are taught

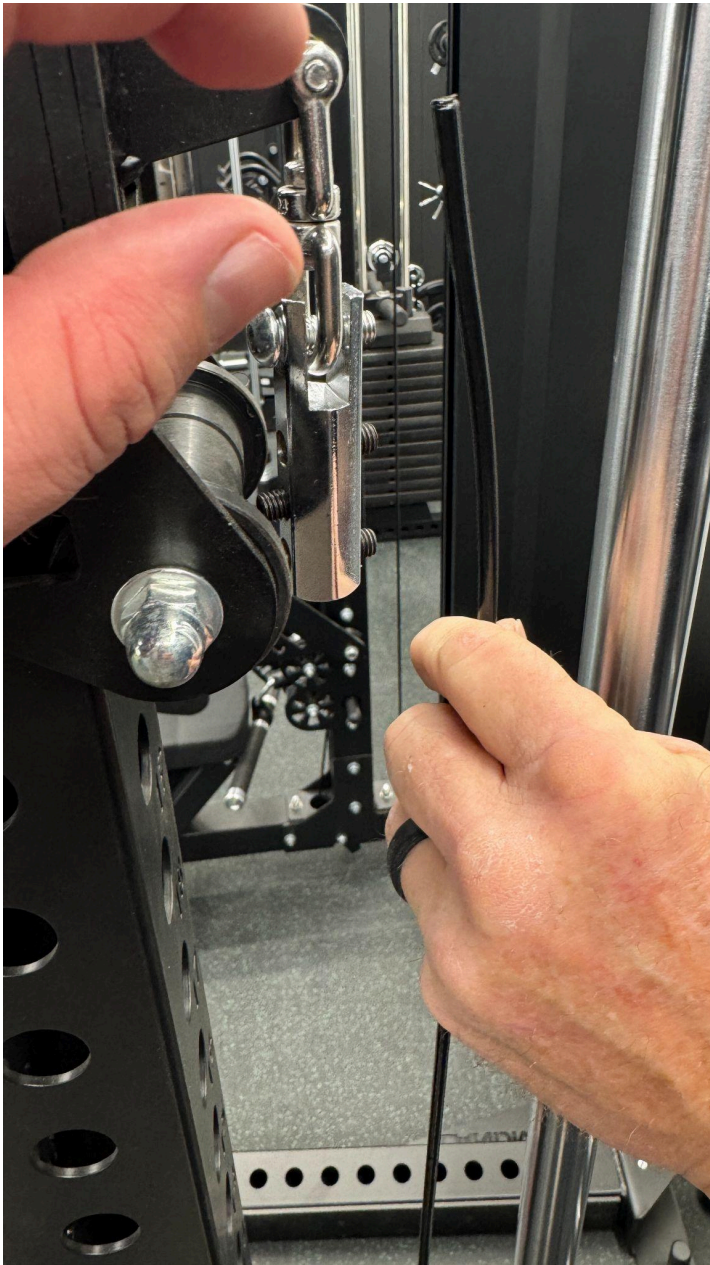


Step 1:

Be sure to set your weight stack top plate high with your pin set in the stack to give yourself cable slack. It will make working with the cables easier.

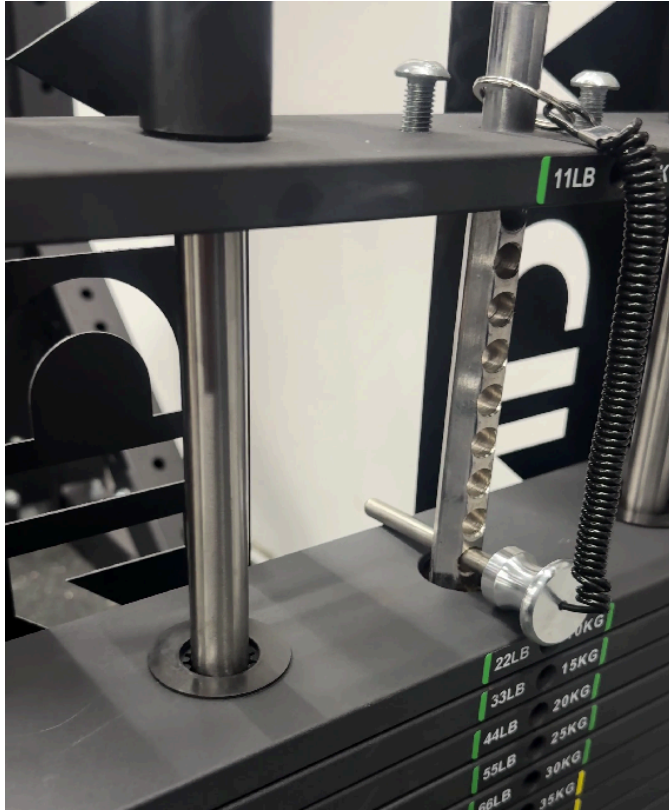

Step 2:

Push up the protective sleeve to expose Part # 24 Cable Connection

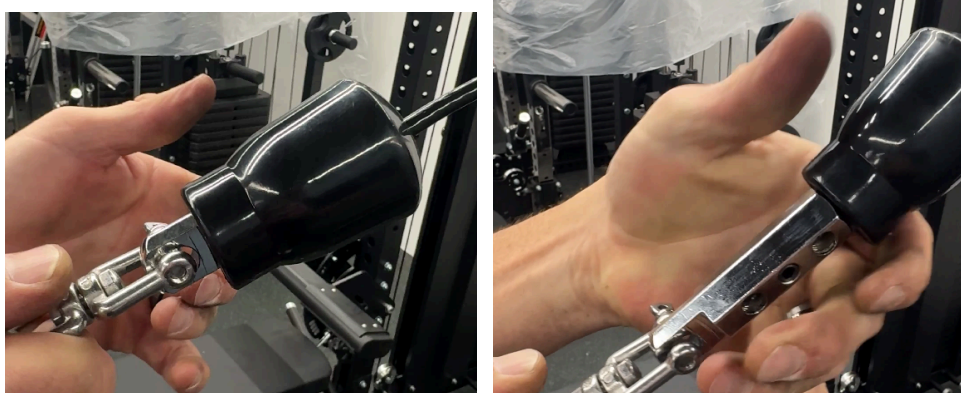


Step 3:

Undo the existing set screws and ensure the cable is pushed all the way up to the top of the Connector (Part #24)

Step 4:

The 3 set screws should be separated. 2 on one side of part # 24, and one on the opposite side of part #24 (placed in the center). Start by tightening the center set screw all the way.

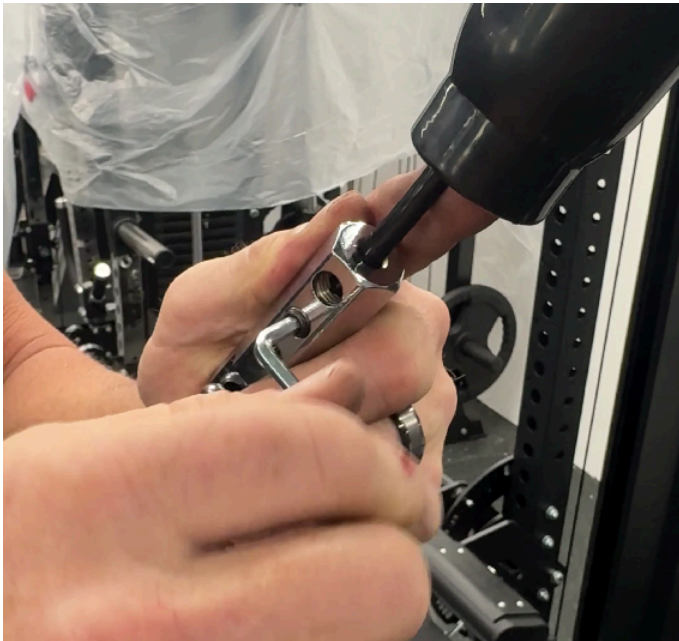


Step 5:

Flip it over and tighten the other two set screws on the opposite side. (We will be repeating these steps 3 times).



Step 6:

Flip it back over and tighten the middle set screw again

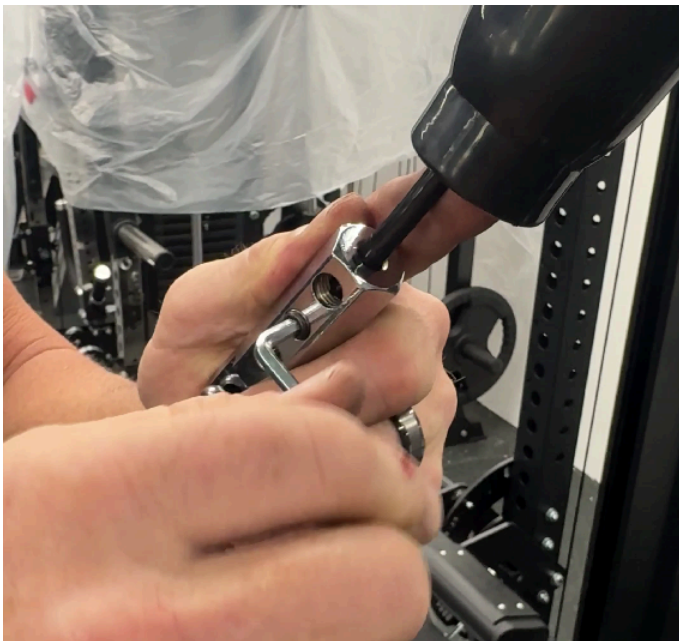

Step 7:

Flip it back over again and tighten the other two set screws on the opposite side



Step 8:

Flip it back over and tighten the middle set screw again. Make sure it is fully tightened



Step 9:

Flip it back over again and tighten the other two set screws on the opposite side. Make sure they are fully tightened



Step 10:

Slide the protective sleeve back over Part # 24



Step 11:

Set the weight stack with heavy weight, and test the cable to ensure it is working accurately and the connection is tight.

